



Workplace Solutions

## REELS

# COMMERCIAL / INDUSTRIAL CORD and HOSE REELS

- **RUGGED STEEL CONSTRUCTION • CORDS TO 50' LONG • HOSES TO 35'**
- **SPRING REWIND • MOUNT UNDER BENCH...HANG FROM WALL OR CEILING**

### Cable Reels. Choose lamp, single outlet or dual outlet box.

Economical, yet full featured, these reels are ideal for a wide variety of applications. Available with 12, 14 or 16 gage three conductor SJOW-A cord and your choice of single outlet, dual outlet box, incandescent hand lamp, fluorescent hand lamp or bare cord for customer installation of terminal appliance. Cord length varies from 20' to 50' depending on cord size and reel spool diameter. All reels include spring rewind and ratchet lock. Operator simply pulls cord off spool...the ratchet lock maintains desired cable length. When task is completed, a slight pull on the cable releases the ratchet allowing the spring motor to rewind the cable. Both hand lamps include on-off switch. Fluorescent lamp features directed light from one side and end, polycarbonate outer tube and end lens and integral ballast. All reels are constructed with UL recognized components.



Cord reel equipped with  
DUAL OUTLET BOX



Reel with  
SINGLE OUTLET



Reel with  
FLUORESCENT LAMP



### Hose Reels. Choose 1/4" or 3/8" hose for air or water.

Ideal mounted under workbench. May also be hung from wall or ceiling (ceiling mounting bracket included). Reels feature spring rewind and ratchet lock, which may be disabled if desired. All have rugged, one piece frame as well as steel spool and cover. Steel components protected by durable black and gray baked polyester finish. Inlet is 3/8"NPT (1/4" reducer included).



Cord reel equipped with  
INCANDESCENT LAMP



CEILING MOUNTING BRACKET  
for overhead applications  
INCLUDED

NOTE: Ceiling mounting not recommended for heights over 16 feet or for hose reels carrying liquid.

Hose Reels include 15'-35' of 1/4" or 10'-20' of 3/8" 200 psi.hose.


### MODEL LIST-CORD REELS

UL Type SJOW-A Cord						Reel Size*	Model Number
per Cond.	AWG.	No. Cond.	Length ft.	(m)	Cord End		
10 Amp	16	3	25'	(7.5 m)	Wire Leads	A	CPC-16325-BC
10 Amp	16	3	25'	(7.5 m)	Single Outlet	A	CPC-16325-SC
10 Amp	16	3	25'	(7.5 m)	Duplex Box	A	CPC-16325-DB
10 Amp	16	3	25'	(7.5 m)	Incandescent Lamp	A	CPC-16325-HL
10 Amp	16	2	25'	(7.5 m)	Fluorescent Lamp	A	CPC-16225-FL
10 Amp	16	3	50'	(15.0 m)	Wire Leads	B	CPC-16350-BC
10 Amp	16	3	50'	(15.0 m)	Single Outlet	B	CPC-16350-SC
10 Amp	16	3	50'	(15.0 m)	Duplex Box	B	CPC-16350-DB
10 Amp	16	3	50'	(15.0 m)	Incandescent Lamp	B	CPC-16350-HL
10 Amp	16	2	50'	(15.0 m)	Fluorescent Lamp	B	CPC-16250-FL
15 Amp	14	3	25'	(7.5 m)	Wire Leads	A	CPC-14325-BC
15 Amp	14	3	25'	(7.5 m)	Single Outlet	A	CPC-14325-SC
15 Amp	14	3	25'	(7.5 m)	Duplex Box	A	CPC-14325-DB
10 Amp	14	3	25'	(7.5 m)	Incandescent Lamp	A	CPC-14325-HL
15 Amp	14	3	50'	(15.0 m)	Wire Leads	B	CPC-14350-BC
15 Amp	14	3	50'	(15.0 m)	Single Outlet	B	CPC-14350-SC
15 Amp	14	3	50'	(15.0 m)	Duplex Box	B	CPC-14350-DB
10 Amp	14	3	50'	(15.0 m)	Incandescent Lamp	B	CPC-14350-HL
20 Amp	12	3	20'	(7.5 m)	Wire Leads	A	CPC-12320-BC
20 Amp	12	3	20'	(7.5 m)	Single Outlet	A	CPC-12320-SC
20 Amp	12	3	20'	(7.5 m)	Duplex Box	A	CPC-12320-DB
10 Amp	12	3	20'	(7.5 m)	Incandescent Lamp	A	CPC-12320-HL
20 Amp	12	3	45'	(13.5 m)	Wire Leads	B	CPC-12345-BC
20 Amp	12	3	45'	(13.5 m)	Single Outlet	B	CPC-12345-SC
20 Amp	12	3	45'	(13.5 m)	Duplex Box	B	CPC-12345-DB
10 Amp	12	3	45'	(13.5 m)	Incandescent Lamp	B	CPC-12345-HL

### MODEL LIST-HOSE REELS

HOSE DATA				Reel Size*	Model Number
Inside Diameter in. (mm)	Input & Output Fittings	Length ft. (m)	Max Pres. psi (N/mm2)		
1/4 (6)	0.25 NPT	15' (4.5 m)	200 (1.38)	A	CPH-2515
1/4 (6)	0.25 NPT	35' (10.5 m)	200 (1.38)	B	CPH-2535
3/8 (9)	0.38 NPT	10' (3.0 m)	200 (1.38)	A	CPH-3810
3/8 (9)	0.38 NPT	20' (6.0 m)	200 (1.38)	B	CPH-3820

### DIMENSIONS inches (mm)

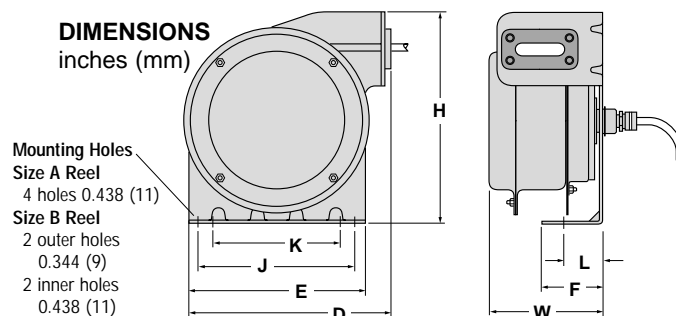

	D	E	F	H	W	J	K	L
<b>SIZE A</b>								
Spool Diameter	10.31 (262)	9.00 (229)	3.13 (78)	10.75 (273)	5.78 (147)	8.00 (203)	6.50 (165)	2.00 (51)
4 holes 0.438 (11)								
<b>SIZE B</b>								
Spool Diameter	12.87 (327)	11.00 (279)	3.50 (89)	12.89 (327)	6.25 (159)	8.00 (203)	6.50 (165)	2.19 (55)
2 outer holes 0.344 (9)								
2 inner holes 0.438 (11)								